

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

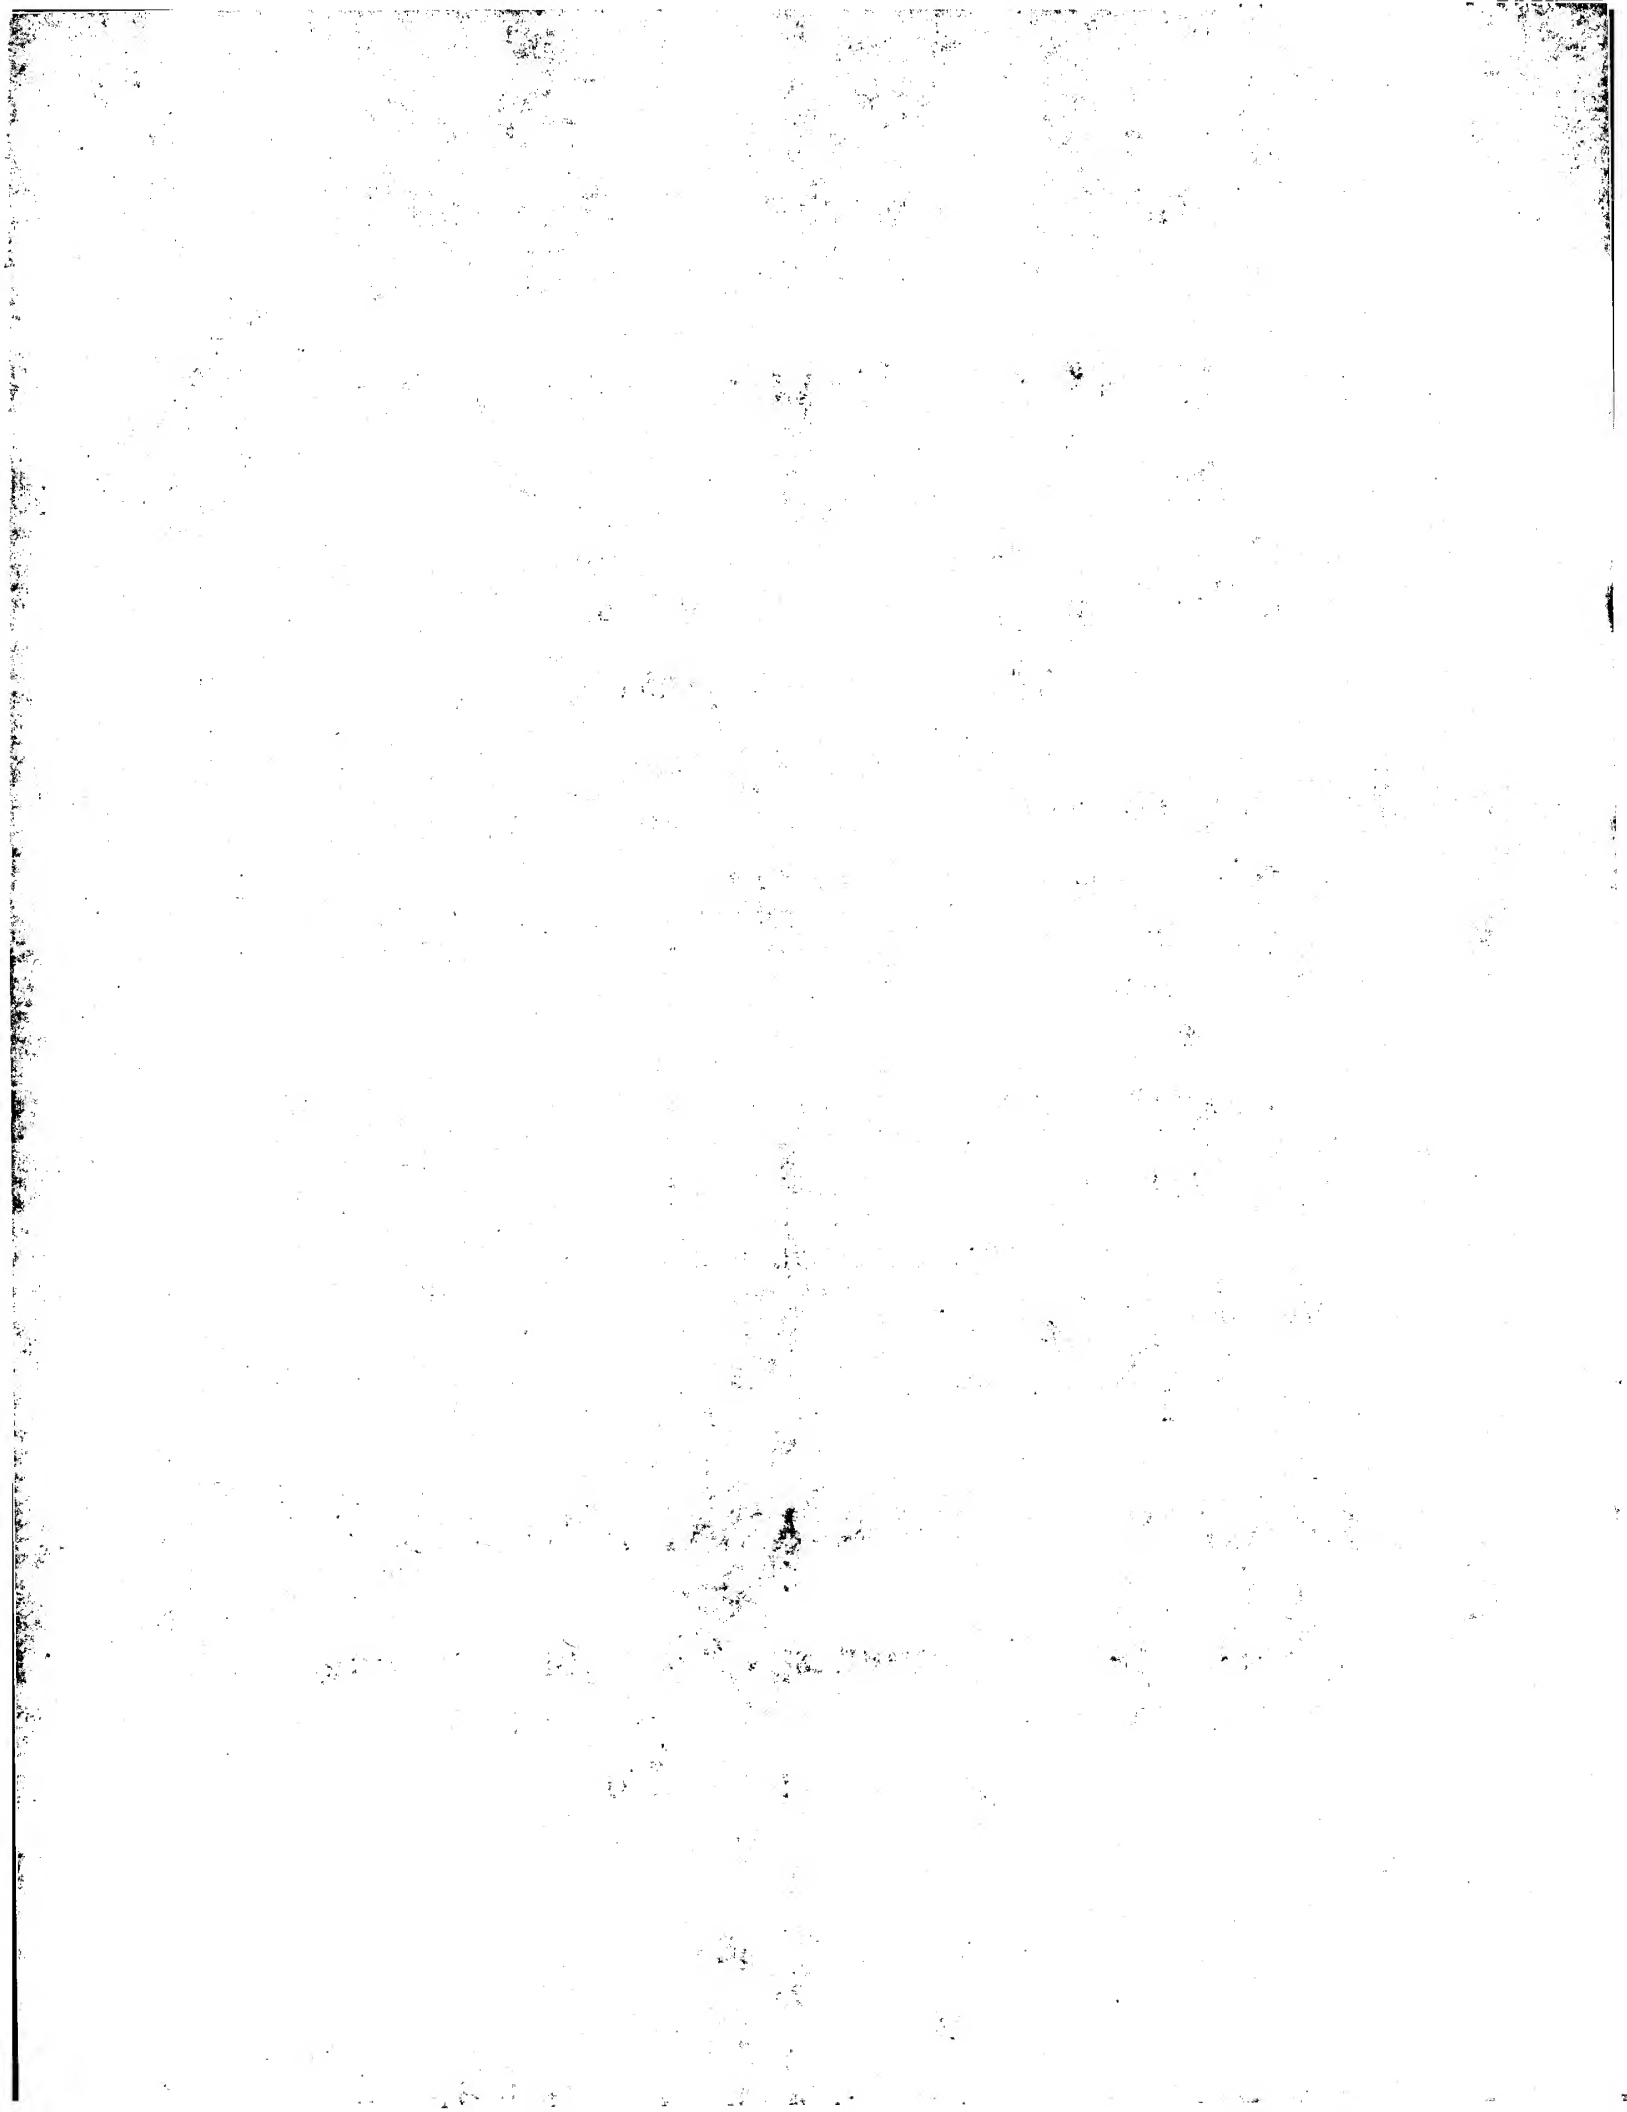

(19) World Intellectual Property Organization  
International Bureau

(43) International Publication Date  
25 April 2002 (25.04.2002)


PCT

(10) International Publication Number  
WO 02/32804 A2

- (51) International Patent Classification<sup>7</sup>: B66C
- (21) International Application Number: PCT/US01/32248
- (22) International Filing Date: 17 October 2001 (17.10.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/241,318 18 October 2000 (18.10.2000) US
- (71) Applicant: GORBEL, INC [US/US]; 600 Fishers Run, Fishers, NY 14453-0593 (US).
- (72) Inventor: TAYLOR, Michael, K.; 3455 Lyon Road, Marion, NY 14505 (US).
- (74) Agents: SCOTT, Steven, R. et al.; Eugene, Stephens & Associate, 56 Windsor Street, Rochester NY 14605 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PENDANT-RESPONSIVE CRANE CONTROL

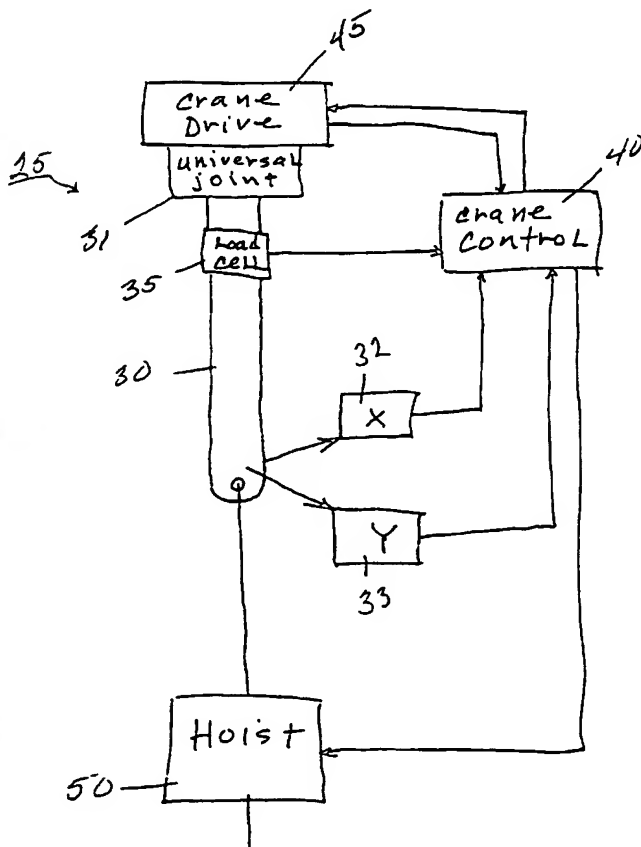

(57) Abstract: This pendant responsive crane control system has a sensor pendulum arranged above a hoist for the crane and a load sensor for determining the load lifted by the hoist. The sensor pendulum serves as a swinging link between the hoist and a crane drive for moving the hoist. Lateral movement sensors generate signals in response to lateral movement of the sensor pendulum. A crane control means directs lateral movement of the crane drive in response to the signals generated by these sensors. The load sensor used is preferably a load cell or strain gauge incorporated into the sensor pendulum.

WO 02/32804 A2



**Published:**

— without international search report and to be republished  
upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## PENDANT-RESPONSIVE CRANE CONTROL

This application claims the benefit of U. S. Provisional Application No. 60/241,318, filed on 18 October 2000, which provisional  
5 application is incorporated by reference herein,

### Technical Field

Overhead and jib cranes that can be driven to move a lifted load in a horizontal direction.

### Background

10 Suggestions have been made for power-driven cranes to move a hoisted load laterally in response to manual effort applied by a worker pushing on the lifted load. A sensing system determines from manual force input by a worker the direction and extent that the load is desired to be moved, and the crane responds to this by driving  
15 responsively to move the lifted load to the desired position. Examples of such suggestions include U.S. Patents 5,350,075 and 5,850,928 and Japanese Patent JP2018293.

A problem encountered by such systems is a pendulum effect of the lifted load swinging back and forth. For example, as the crane  
20 starts moving in a desired direction, the mass of the load momentarily lags behind and then swings toward the desired direction. A sensing system included in the crane can misinterpret such pendulum swings for worker input force. This can result in the crane driving in one direction, establishing a pendulum swing, sensing that as a reverse  
25 direction indicator, and driving in the opposite direction, causing a dithering motion. In effect, by misinterpreting pendulum swings as worker input force, the crane can misdirect the load in various ways that are not efficient or ergonomically satisfactory.

## Summary of the Invention

The inventive solution involves a sensing pendulum arranged above a hoist for the crane and a sensor for determining the load lifted by the hoist. The load sensor is preferably a load cell or strain gauge incorporated into the sensor pendulum. Arranging a sensor pendulum above the hoist provides some beneficial mechanical damping of pendulum effects from the hoist swinging below the sensing pendulum and the cable or rope and load swinging below the hoist. Two pendulum links below the sensing pendulum, including the hoist and load, divide or distribute pendulum effects and make them less evident to motion sensors arranged above the hoist to respond to the sensing pendulum. Crane control software receiving lateral load movement information from X and Y sensors arranged above the hoist, along with information on the mass of any load suspended from the hoist, can better distinguish between worker input force and consequential movement of the pendulum links below the sensor pendulum.

The invention thus involves arranging a sensor pendulum and associated X and Y sensors above a crane hoist while also sensing the mass of any load suspended from the hoist. Such a mechanical arrangement of motion and load sensors enables a crane control system to derive more reliable information on worker input force to the load and more reliably drive the crane in a desired direction to move a hoisted load to a position indicated by a worker. Preparing suitable software for driving the crane in response to worker input is made easier by suspending the hoist from a sensing pendulum that senses load mass and supplying load motion signals to crane control software from sensors detecting movement of the pendulum above the hoist.

## Drawings

FIG. 1 is a schematic view illustrating pendant crane control sensors arranged above a hoist supporting a lifted load and pushed toward a destination by a worker.

FIG. 2 is a schematic diagram of a sensing pendulum arranged above a hoist and interconnected with a control system for driving a crane to a position indicated by worker input.

### Detailed Description

5        FIG. 1 illustrates that sensors 25 for pendant crane 10 are arranged above hoist 50 supporting a lifted load 20. A worker 11 pushing on load 20 as illustrated can urge load 20 in a desired direction of movement. Sensors 25 are arranged to sense force input to load 20 by worker 11 who indicates by the input force a desired direction of lateral movement for load 20. Crane 10 then responds to input force by worker 11 to drive sensors 25 and hoist 50 to the desired location for lowering load 20.

15        Since load 20 is supported on cable or rope 21 suspended from hoist 50, load 20 and rope 21 can act as a pendulum swinging below hoist 50. Hoist 50, which is suspended from crane 10 by connector 51, can also have a pendulum effect resulting in hoist 50 swinging below crane 10 in response to lateral movement of load 20. Hoist 50 and its suspension 51 thus constitute one link in a two-link pendulum, the other link of which involves rope 21 and load 20. As drive system 20 45 of crane 10 moves load 20 horizontally in response to force input from worker 11, pendulum effects of load 20 and hoist 50 can occur in addition to desired-direction-of-movement-force input by worker 11.

25        Sensors 25, as best shown in FIG. 2, are arranged above hoist 50 where they are less subject to pendulum effects of load 20 and hoist 50. Sensors 25, in the preferred location above hoist 50, can effectively detect worker input force distinguished from pendulum effects of hoist 50 and load 20 to supply crane control 40 with information necessary to operate crane drive 45 and move lifted load 20 to the position desired by worker 11.

30        A principal element of sensors 25 is sensing pendulum 30 suspended by a universal joint 31 from crane drive 45, which is typically a hoist trolley that is driven in response to crane control 40. Universal joint 31 can be any of a variety of devices that allow pendulum 30 to swing in any direction in a lateral x-y plane, as

illustrated. Universal joint 31 can thus be a ball joint, hook and ring joint, double clevises perpendicular to each other, etc. Preferably, joint 31 is compact, involves low friction, and enables pendulum 30 to swing responsively within the x-y plane.

5       An x sensor 32 and a y sensor 33 are near a lower region of pendulum 30 where sensors 32 and 33 are arranged perpendicular to each other to respectively sense x and y direction swing movements of pendulum 30. Sensors 32 and 33 can have a variety of forms including mechanical, electromechanical, and optical; and preferences among  
10 these forms include linear encoders, optical encoders, and electrical devices responsive to small movements. Sensors 32 and 33 preferably sense magnitude as well as direction of swinging movement of sensing pendulum 30, and sensors 32 and 33 are connected with crane control  
15 40 to supply both amplitude and directional information on movement sensed by pendulum 30.

For pendant crane 10 to be successful in determining the force input of worker 11 and moving load 20 to a desired position, it is important for crane control 40 to receive information indicating the mass of any load 20 involved in the movement. The force or mass of  
20 load 20 is preferably sensed by a load cell or strain gauge 35 incorporated into sensing pendulum 30, but other possibilities can also be used. A load sensor incorporated into or suspended below hoist 50, for example. There are advantages, though, in including load sensor 35 in a compact package including directional force sensors 32 and 33  
25 arranged above hoist 50. If lifting height constraints are a problem for a particular pendant crane, it is possible to arrange sensors 25 between a pair of bridge beams separated by enough space to receive sensors 25 so that hoist 50 can be suspended directly below the pair of bridge beams at the same elevation that it would have had if  
30 suspended from a single bridge beam.

In operation, once load 20 is lifted by hoist 50, worker 11 pushes against load 20 to indicate a desired direction of movement. Deflection of load 20 and rope 21 will depend on the force of directional input from worker 11 and by the mass of load 20. This will cause some  
35 movement of load 20 and rope 21 and some smaller movement of hoist

50. It will also cause movement of sensing pendulum 30 above hoist 50, and this movement will be sensed by detectors 32 and 33 for both amplitude and direction. The detected lateral movement of pendulum 30 is fed to crane control 40, along with information on the mass of load 20, as sensed by load sensor cell 35. With these inputs, control software within crane control 40 sends information to crane drive 45, which moves a crane trolley or bridge in the direction indicated by the worker.

Starting crane 10 in motion can cause pendulum effects in load 20 and hoist 50 in response to crane movement. It is important for crane control 40 not to respond erroneously to such pendulum effects from crane movement and to respond only to movement effects from input of worker 11. Arranging sensors 25 above hoist 50 helps in making this distinction. Software in crane control 40, when provided by signals from sensors 32, 33, and 35 arranged above hoist 50 can more reliably distinguish directional force input of worker 11 from responsive swings of the two-link pendulum formed of hoist 50 and load 20. Experience has shown that making this distinction by sensing pendulum movements of load 20 or hoist 50 is daunting compared to making the same distinctions by using sensing pendulum 30 arranged above hoist 50.

**I CLAIM:**

1. A pendant responsive crane control system, comprising:  
a swinging link between a hoist for lifting a load and a crane drive  
for moving said hoist;  
5 lateral movement sensor means that generates signals in  
response to lateral movement of said swinging link; and  
crane control means directing lateral movement of said crane  
drive in response to the signals generated by said sensors.
2. A pendant responsive crane control system as set forth in  
10 claim 1, wherein said swinging link is directly connected to said crane  
drive.
3. A pendant responsive crane control system as set forth in  
claim 1, wherein said swinging link is directly connected to said crane  
drive by a universal joint.
- 15 4. A pendant responsive crane control system as set forth in  
claim 1, wherein said sensor means generates signals indicating  
direction of lateral movement.
5. A pendant responsive crane control system as set forth in  
claim 1, wherein said sensor means generates signals indicating the  
20 direction and magnitude of lateral movement.
6. A pendant responsive crane control system as set forth in  
claim 1, further comprising a load sensor that generates load signals in  
response to the load thereon.
7. A pendant responsive crane control system as set forth in  
25 claim 6, wherein said load sensor is located above said hoist.
8. A pendant responsive crane control system as described in  
claim 7, wherein said swinging link includes said load sensor.
9. A pendant responsive crane control system as set forth in  
claim 8, wherein said load sensor is a load cell.

10. A method for controlling a pendant responsive crane system, comprising:

generating lateral movement signals via lateral movement sensors responsive to lateral movement of a swinging link positioned between a hoist for lifting a load and a crane drive for moving said hoist; and directing lateral movement of said crane drive via a crane control means responsive to the signals generated by said sensors.

11. A method for controlling a pendant responsive crane system as set forth in claim 10, said first step further comprising generating load signals via load sensors.

12. A pendant responsive crane control system, comprising: a swinging link between a hoist for lifting a load and a crane drive for moving said hoist;

lateral movement sensor means that generates signals in response to lateral movement of said swinging link indicating the direction and magnitude of said lateral movement;

a load sensor generating load signals in response to the load thereon; and crane control means directing lateral movement of said crane drive in response to the signals generated by said sensors.

13. A pendant responsive crane control system as set forth in claim 12, wherein said swinging link is directly connected to said crane drive by a universal joint.

14. A pendant responsive crane control system as set forth in claim 12, wherein said load sensor is located above said hoist.

15. A pendant responsive crane control system as described in claim 12, wherein said swinging link includes said load sensor.

16. A pendant responsive crane control system as set forth in claim 12, wherein said load sensor is a load cell.

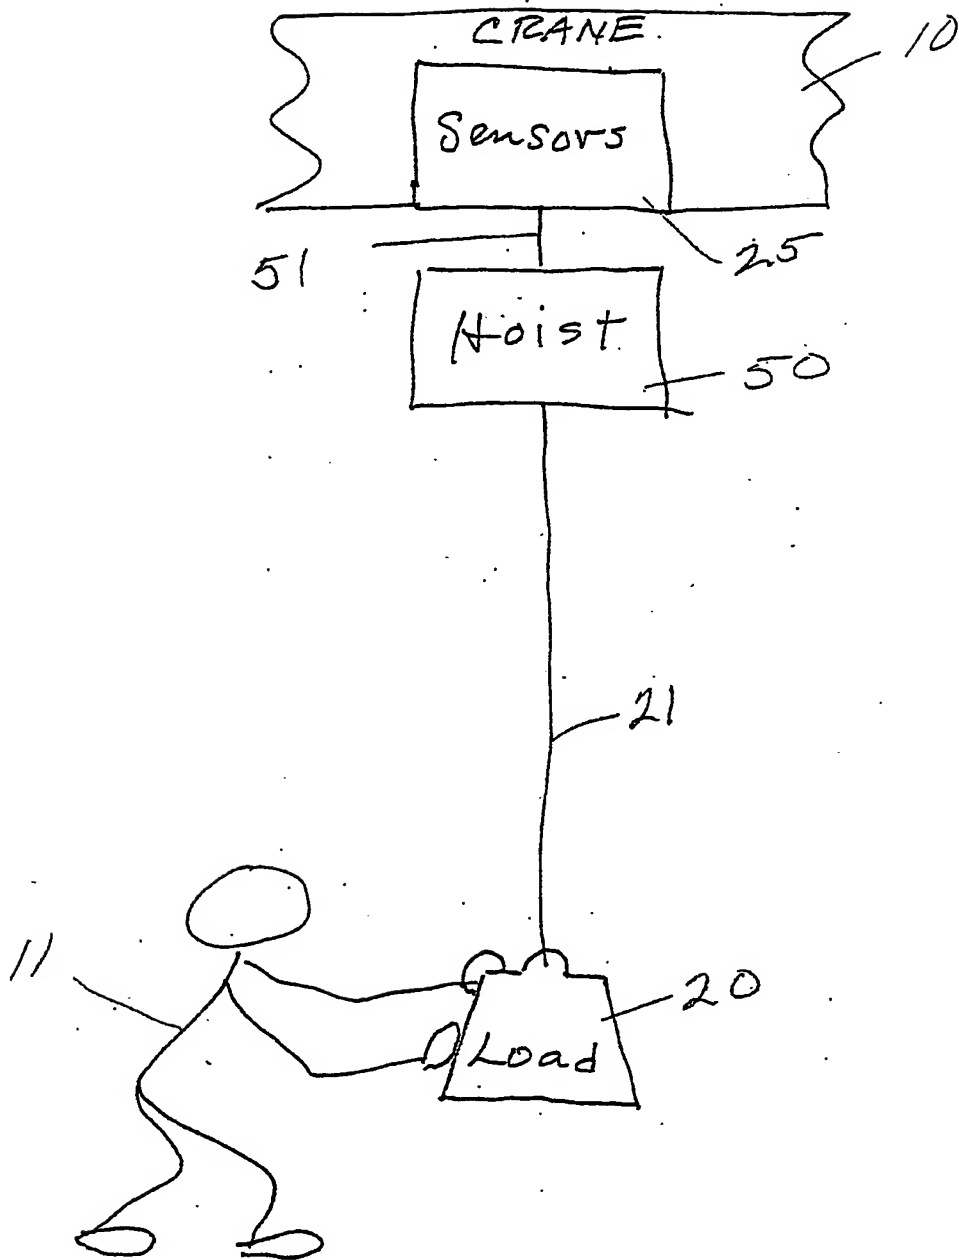


Fig 1


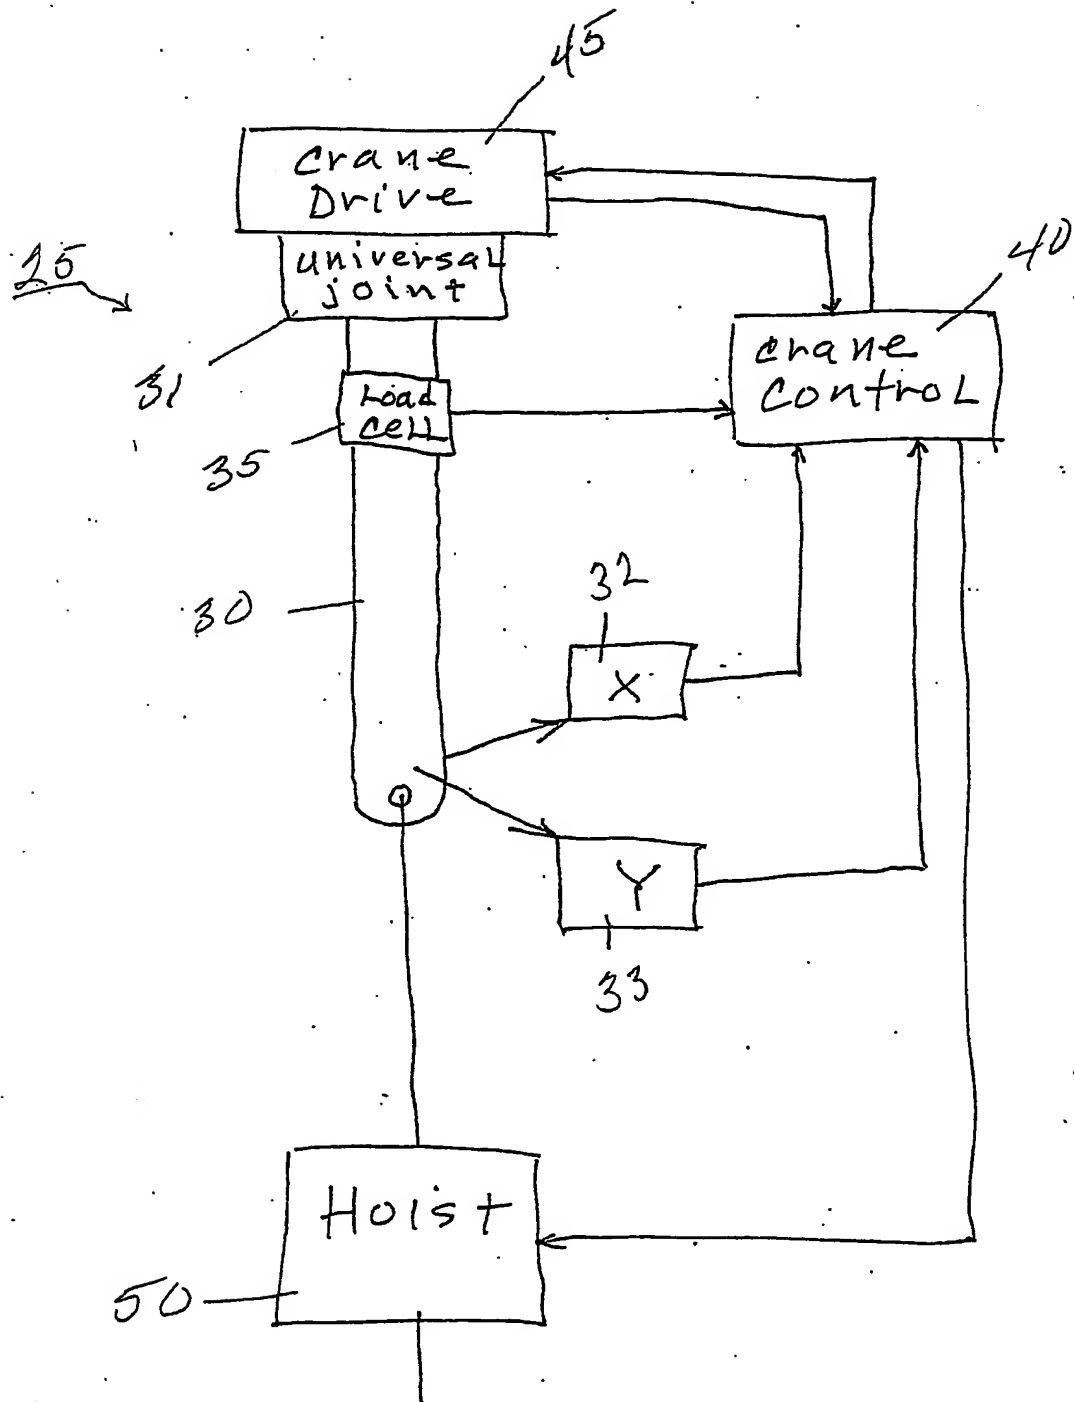


Fig 2.



(19) World Intellectual Property Organization  
International Bureau

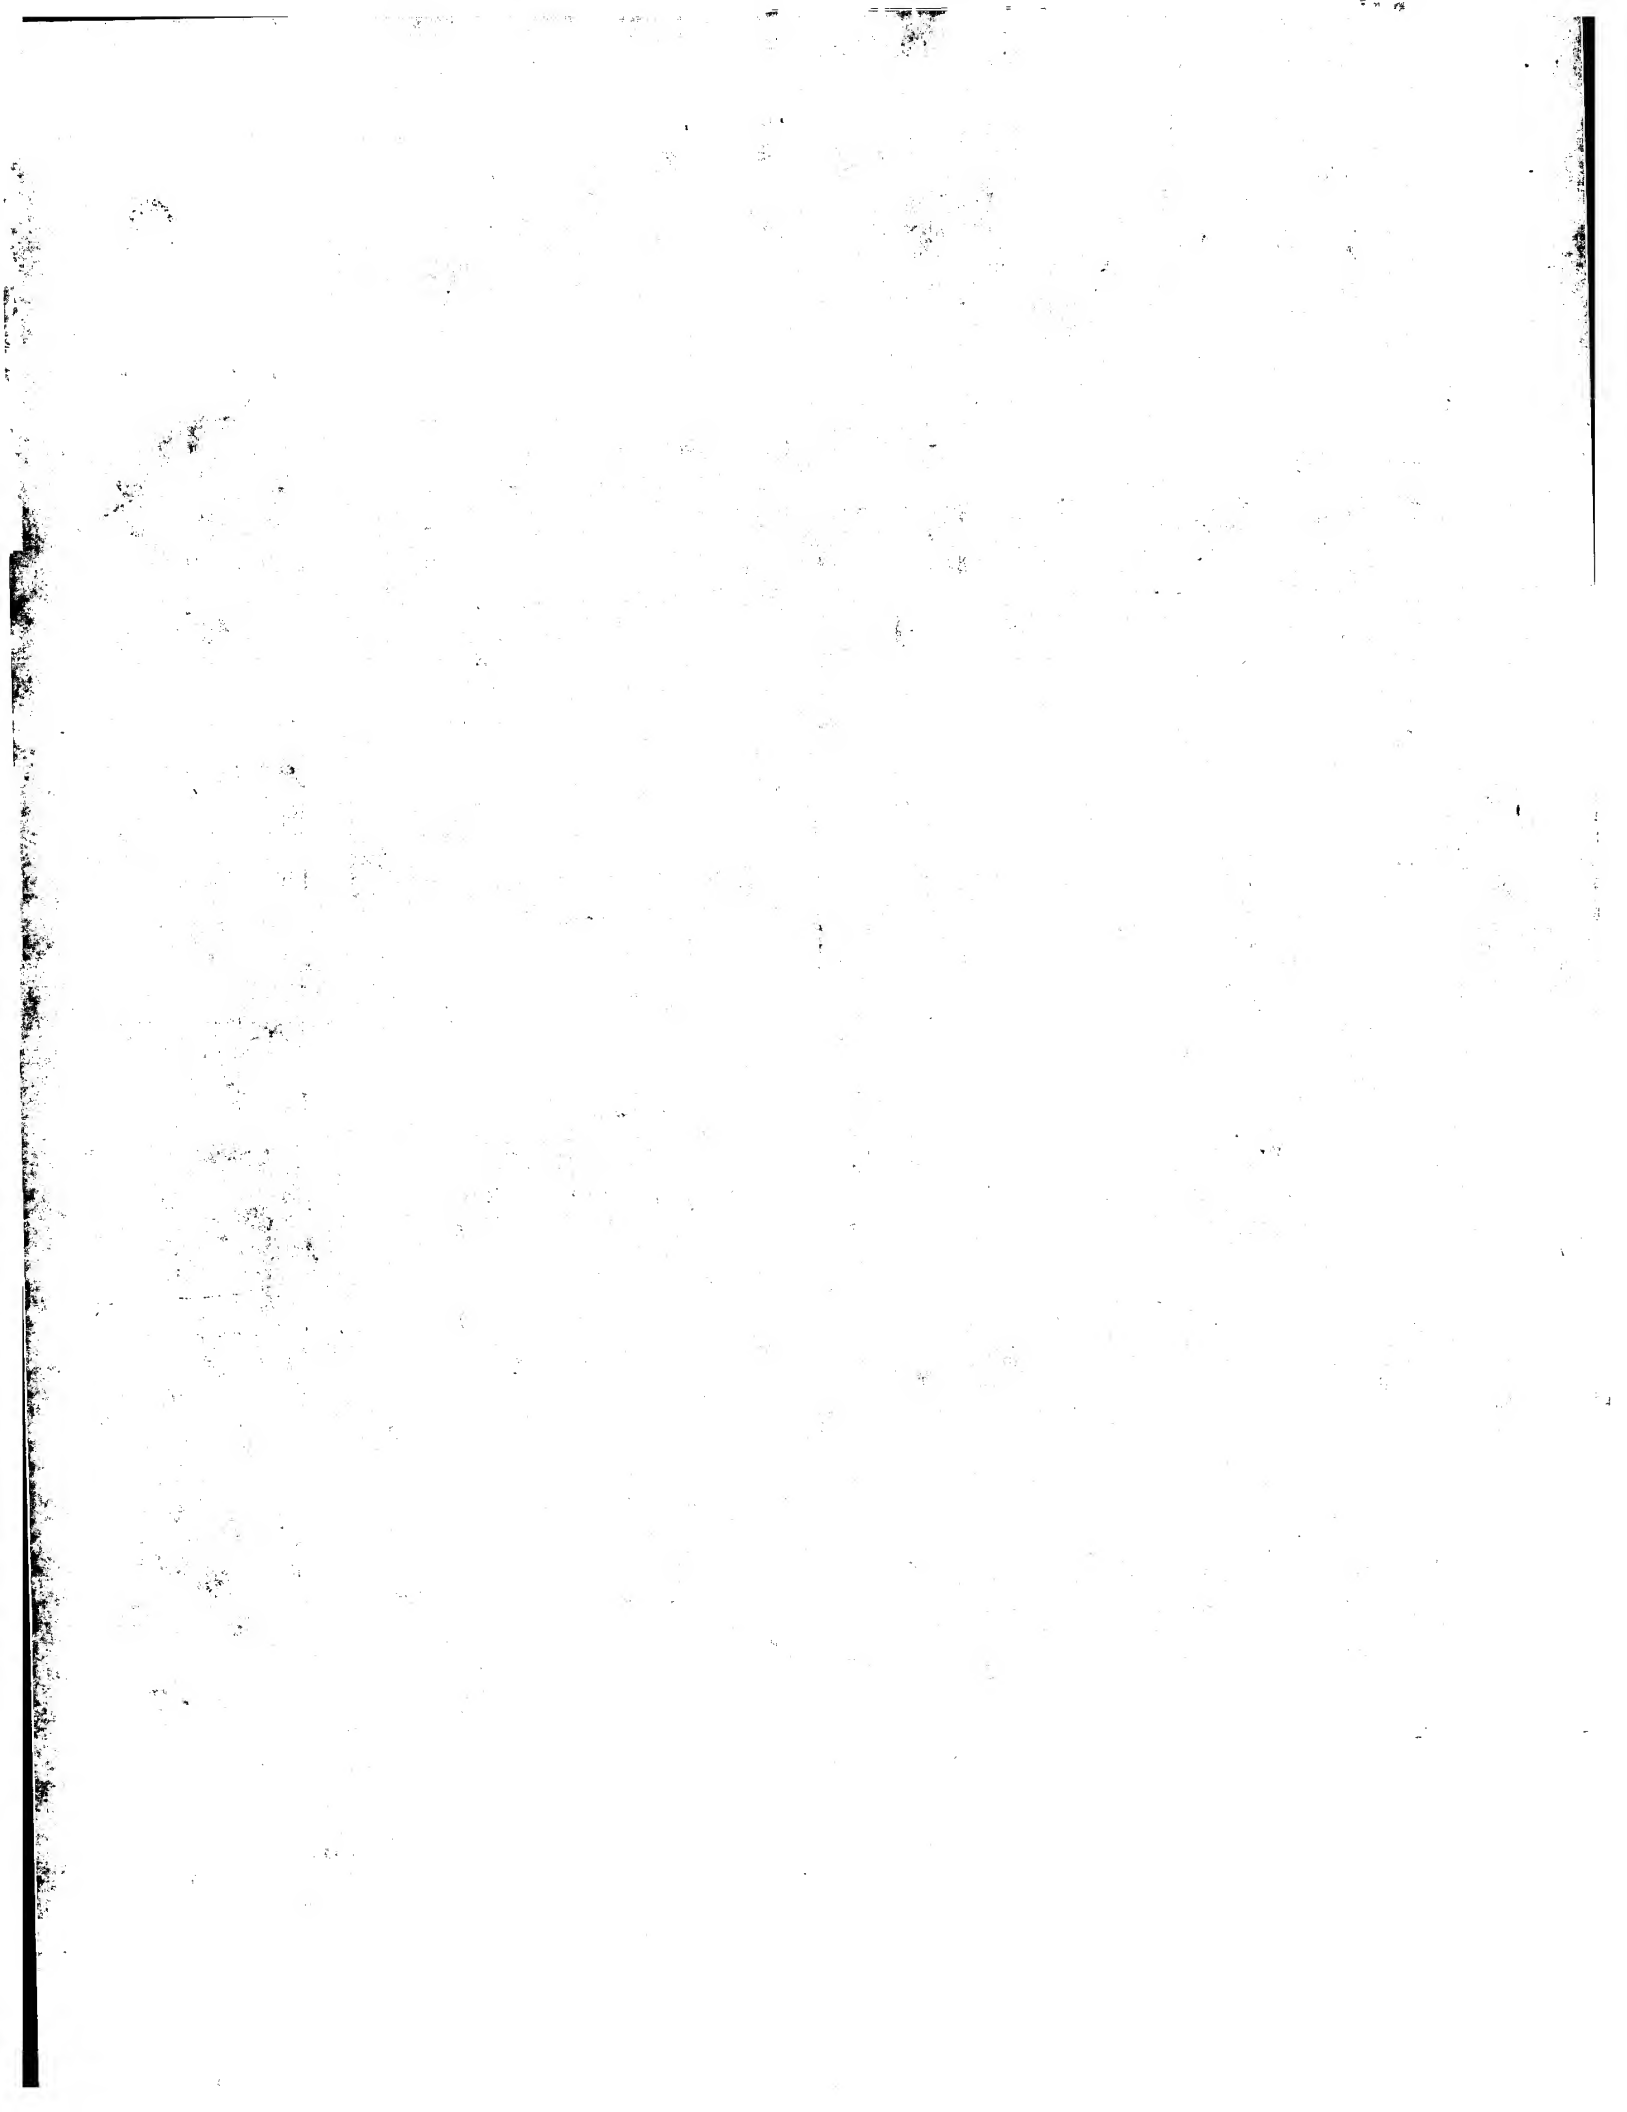

(43) International Publication Date  
25 April 2002 (25.04.2002)

PCT

(10) International Publication Number  
WO 02/032804 A3

(51) International Patent Classification<sup>7</sup>: B66C 11/00

(21) International Application Number: PCT/US01/32248

(22) International Filing Date: 17 October 2001 (17.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/241,318 18 October 2000 (18.10.2000) US

(71) Applicant: GORBEL, INC [US/US]; 600 Fishers Run,  
Fishers, NY 14453-0593 (US).

(72) Inventor: TAYLOR, Michael, K.; 3455 Lyon Road, Mar-  
ion, NY 14505 (US).

(74) Agents: SCOTT, Steven, R. et al.; Eugene, Stephens &  
Associate, 56 Windsor Street, Rochester NY 14605 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI,  
SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA,  
ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,  
TG).

Published:

— with international search report

[Continued on next page]

(54) Title: PENDANT-RESPONSIVE CRANE CONTROL

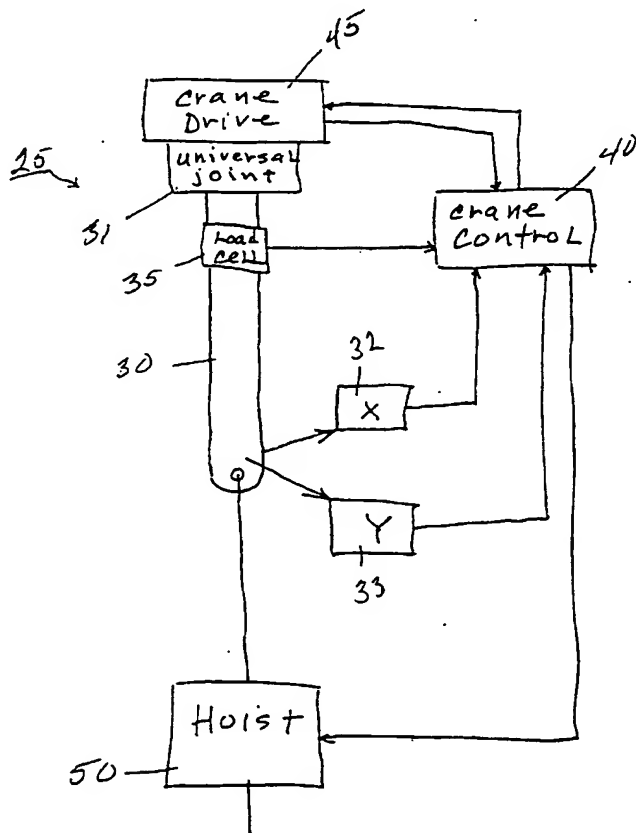

(57) Abstract: This pendant responsive crane control system has a sensor pendulum (30) arranged above a hoist (50) for the crane (10) and a load sensor (35) for determining the load lifted by the hoist (50). The sensor pendulum (30) serves as a swinging link between the hoist (50) and a crane drive (45) for moving the hoist (50). Lateral movement sensors (32, 33) generate signals in response to lateral movement of the sensor pendulum. A crane control means (40) directs lateral movement of the crane drive (45) in response to the signals generated by these sensors (32, 33, 35). The load sensor (35) used is preferably a load cell or strain gauge incorporated into the sensor pendulum (30).

WO 02/032804 A3




(88) Date of publication of the international search report:  
18 July 2002

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US01/32248

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC(7) : B66C 11/00 US CL : 212/285 According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) U.S. : 212/285, 287, 288, 289  Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,350,075 A (KAHLMAN) 27 September 1994.	NONE
A	US 5,850,928 A (KAHLMAN et al) 22 December 1998.	
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"G" document member of the same patent family	
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search 08 MARCH 2002	Date of mailing of the international search report 18 APR 2002	
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer THOMAS J BRAHAN <i>Diane Smith</i> Telephone No. (703) 305-1113	

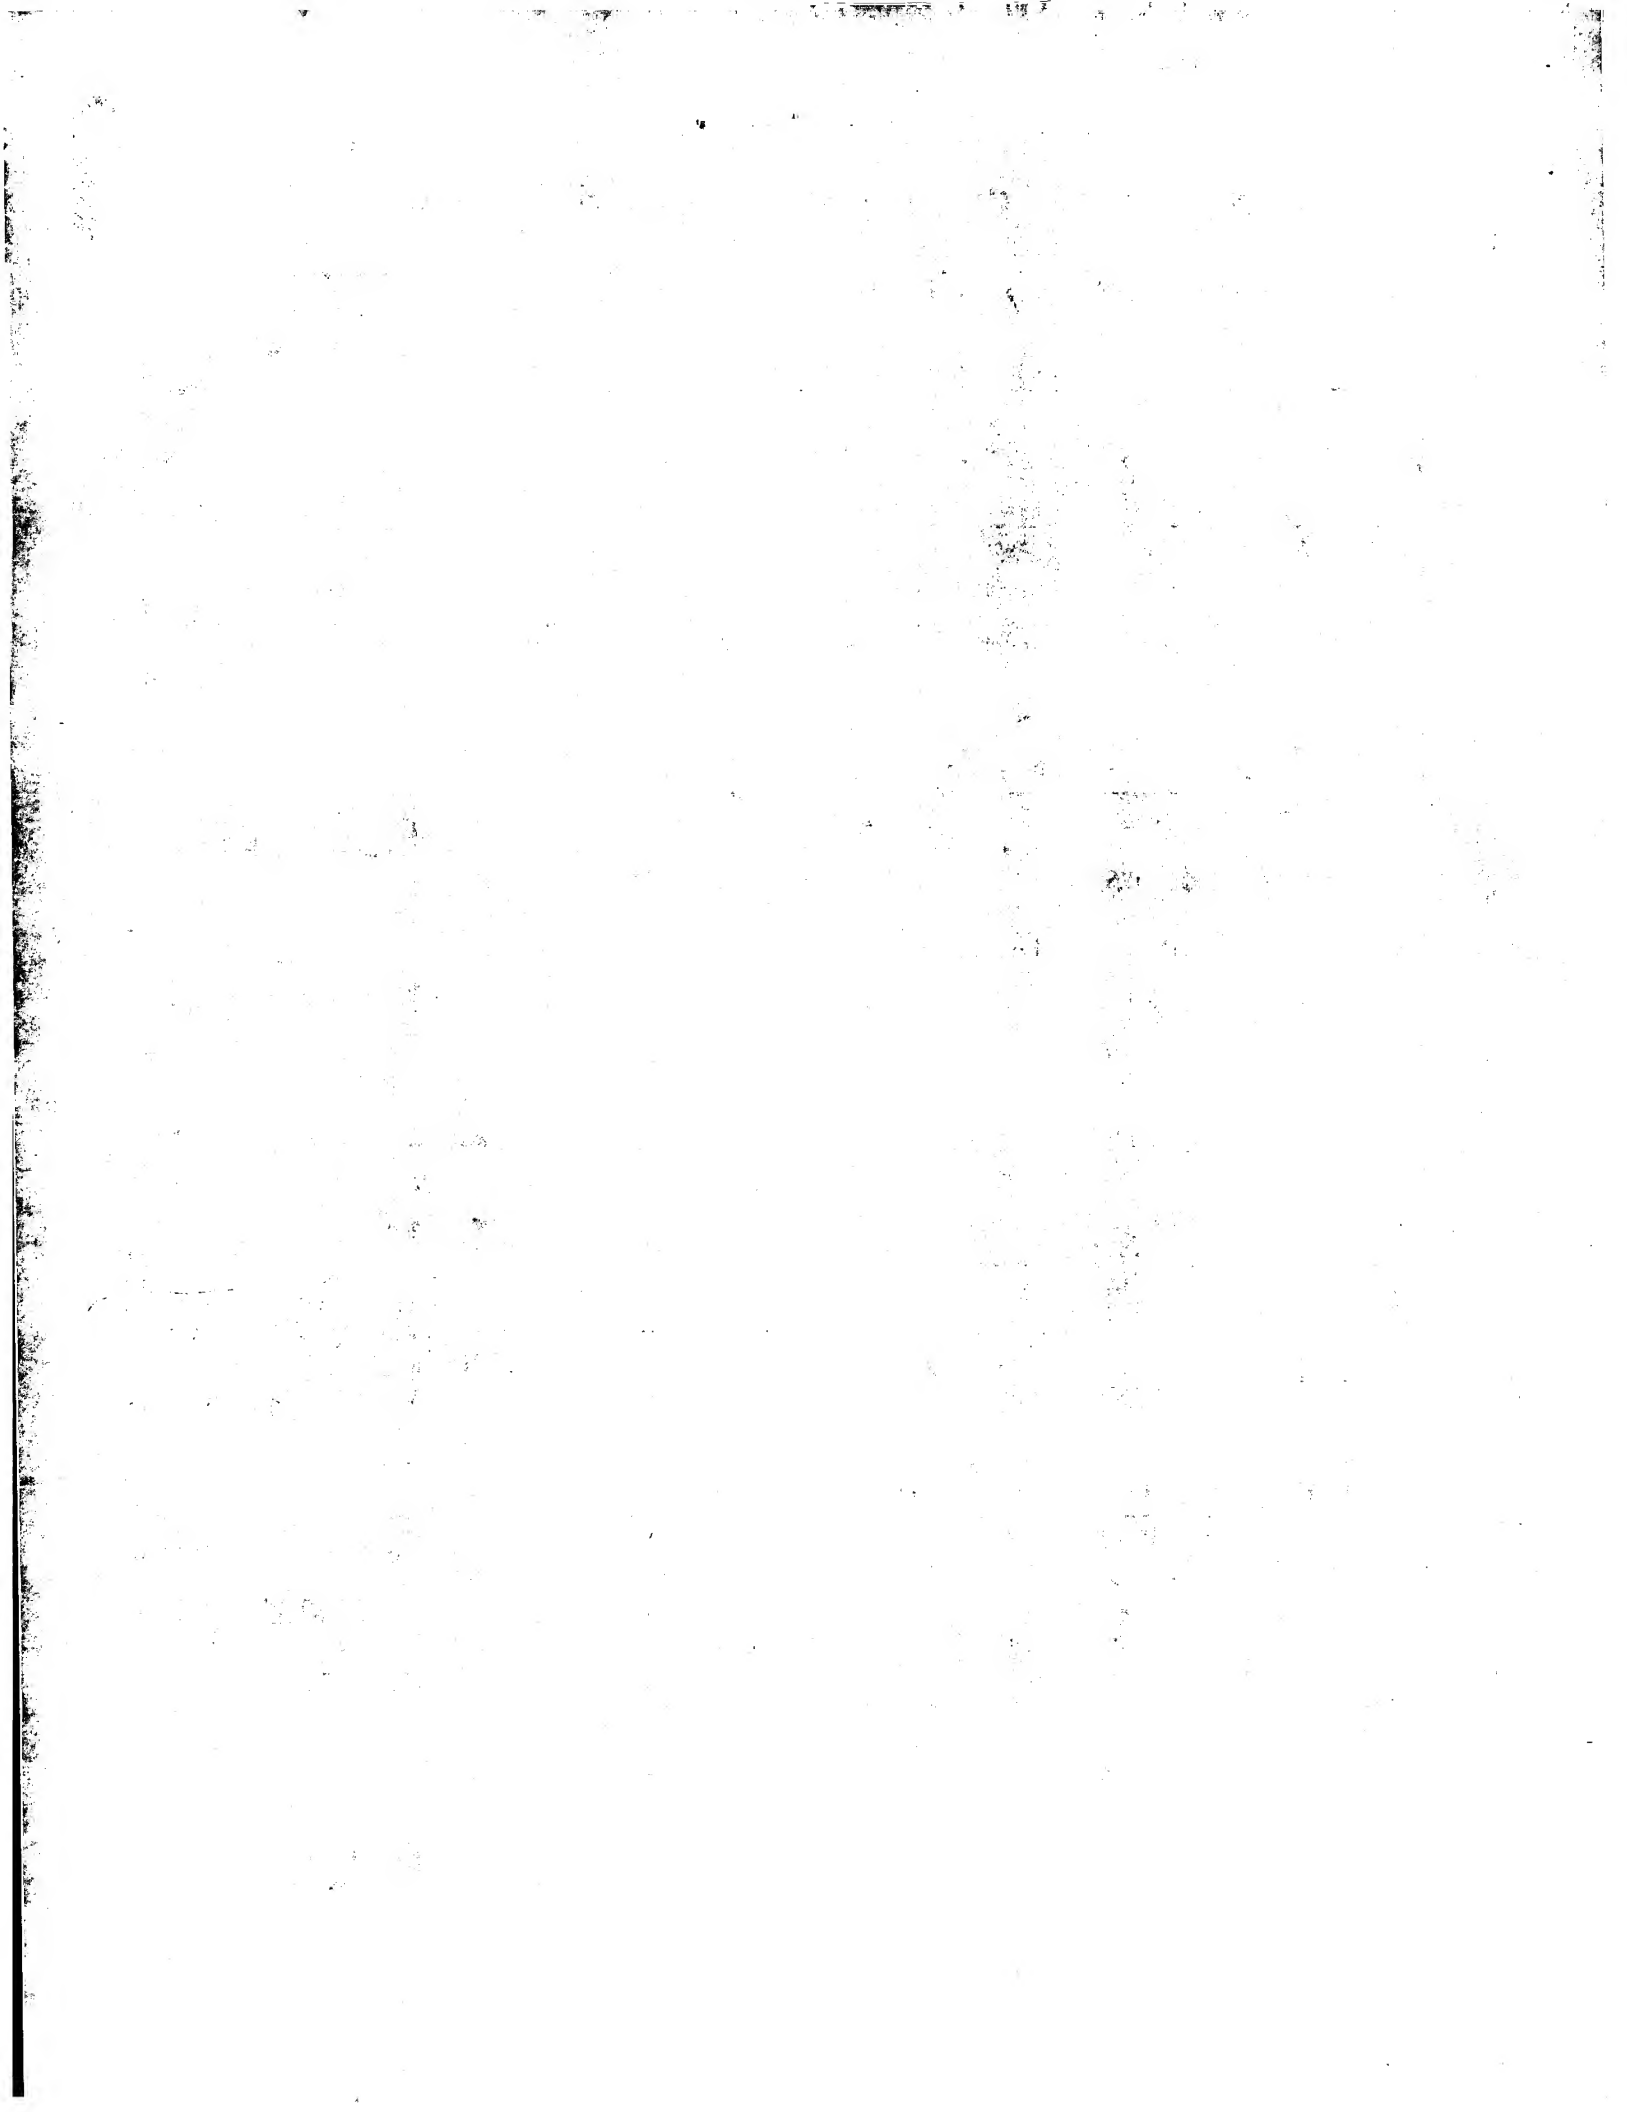

CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
25 April 2002 (25.04.2002)

PCT

(10) International Publication Number  
WO 02/032804 A3(51) International Patent Classification<sup>7</sup>: B66C 11/00

(74) Agents: SCOTT, Steven, R. et al.; Eugene, Stephens &amp; Associate, 56 Windsor Street, Rochester NY 14605 (US).

(21) International Application Number: PCT/US01/32248

(22) International Filing Date: 17 October 2001 (17.10.2001)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:  
60/241,318 18 October 2000 (18.10.2000) US

(71) Applicant: GORBEL, INC [US/US]; 600 Fishers Run, Fishers, NY 14453-0593 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,

[Continued on next page]

(54) Title: PENDANT-RESPONSIVE CRANE CONTROL

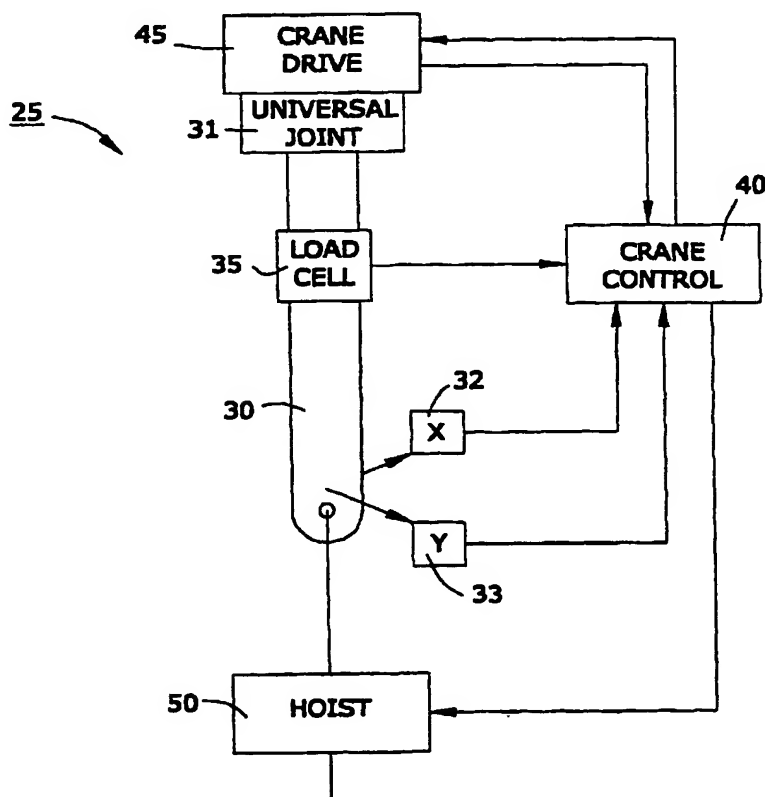

(57) Abstract: This pendant responsive crane control system has a sensor pendulum (30) arranged above a hoist (50) for the crane (10) and a load sensor (35) for determining the load lifted by the hoist (50). The sensor pendulum (30) serves as a swinging link between the hoist (50) and a crane drive (45) for moving the hoist (50). Lateral movement sensors (32, 33) generate signals in response to lateral movement of the sensor pendulum. A crane control means (40) directs lateral movement of the crane drive (45) in response to the signals generated by these sensors (32, 33, 35). The load sensor (35) used is preferably a load cell or strain gauge incorporated into the sensor pendulum (30).

WO 02/032804 A3



CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(48) Date of publication of this corrected version:

13 February 2003

**Published:**

— with international search report

**(15) Information about Correction:**

see PCT Gazette No. 07/2003 of 13 February 2003, Section II

**(88) Date of publication of the international search report:**

18 July 2002

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## PENDANT-RESPONSIVE CRANE CONTROL

This application claims the benefit of U. S. Provisional Application No. 60/241,318, filed on 18 October 2000, which provisional  
5 application is incorporated by reference herein,

### Technical Field

Overhead and jib cranes that can be driven to move a lifted load in a horizontal direction.

### Background

10 Suggestions have been made for power-driven cranes to move a hoisted load laterally in response to manual effort applied by a worker pushing on the lifted load. A sensing system determines from manual force input by a worker the direction and extent that the load is  
15 responsively to move the lifted load to the desired position. Examples of such suggestions include U.S. Patents 5,350,075 and 5,850,928 and Japanese Patent JP2018293.

A problem encountered by such systems is a pendulum effect of the lifted load swinging back and forth. For example, as the crane  
20 starts moving in a desired direction, the mass of the load momentarily lags behind and then swings toward the desired direction. A sensing system included in the crane can misinterpret such pendulum swings for worker input force. This can result in the crane driving in one direction, establishing a pendulum swing, sensing that as a reverse  
25 direction indicator, and driving in the opposite direction, causing a dithering motion. In effect, by misinterpreting pendulum swings as worker input force, the crane can misdirect the load in various ways that are not efficient or ergonomically satisfactory.

## Summary of the Invention

The inventive solution involves a sensing pendulum arranged above a hoist for the crane and a sensor for determining the load lifted by the hoist. The load sensor is preferably a load cell or strain gauge incorporated into the sensor pendulum. Arranging a sensor pendulum above the hoist provides some beneficial mechanical damping of pendulum effects from the hoist swinging below the sensing pendulum and the cable or rope and load swinging below the hoist. Two pendulum links below the sensing pendulum, including the hoist and load, divide or distribute pendulum effects and make them less evident to motion sensors arranged above the hoist to respond to the sensing pendulum. Crane control software receiving lateral load movement information from X and Y sensors arranged above the hoist, along with information on the mass of any load suspended from the hoist, can better distinguish between worker input force and consequential movement of the pendulum links below the sensor pendulum.

The invention thus involves arranging a sensor pendulum and associated X and Y sensors above a crane hoist while also sensing the mass of any load suspended from the hoist. Such a mechanical arrangement of motion and load sensors enables a crane control system to derive more reliable information on worker input force to the load and more reliably drive the crane in a desired direction to move a hoisted load to a position indicated by a worker. Preparing suitable software for driving the crane in response to worker input is made easier by suspending the hoist from a sensing pendulum that senses load mass and supplying load motion signals to crane control software from sensors detecting movement of the pendulum above the hoist.

## Drawings

FIG. 1 is a schematic view illustrating pendant crane control sensors arranged above a hoist supporting a lifted load and pushed toward a destination by a worker.

FIG. 2 is a schematic diagram of a sensing pendulum arranged above a hoist and interconnected with a control system for driving a crane to a position indicated by worker input.

### Detailed Description

5           FIG. 1 illustrates that sensors 25 for pendant crane 10 are arranged above hoist 50 supporting a lifted load 20. A worker 11 pushing on load 20 as illustrated can urge load 20 in a desired direction of movement. Sensors 25 are arranged to sense force input to load 20 by worker 11 who indicates by the input force a desired direction of  
10 lateral movement for load 20. Crane 10 then responds to input force by worker 11 to drive sensors 25 and hoist 50 to the desired location for lowering load 20.

          Since load 20 is supported on cable or rope 21 suspended from hoist 50, load 20 and rope 21 can act as a pendulum swinging below  
15 hoist 50. Hoist 50, which is suspended from crane 10 by connector 51, can also have a pendulum effect resulting in hoist 50 swinging below crane 10 in response to lateral movement of load 20. Hoist 50 and its suspension 51 thus constitute one link in a two-link pendulum, the other link of which involves rope 21 and load 20. As drive system  
20 45 of crane 10 moves load 20 horizontally in response to force input from worker 11, pendulum effects of load 20 and hoist 50 can occur in addition to desired-direction-of-movement-force input by worker 11.

          Sensors 25, as best shown in FIG. 2, are arranged above hoist 50 where they are less subject to pendulum effects of load 20 and hoist  
25 50. Sensors 25, in the preferred location above hoist 50, can effectively detect worker input force distinguished from pendulum effects of hoist 50 and load 20 to supply crane control 40 with information necessary to operate crane drive 45 and move lifted load 20 to the position desired by worker 11.

30           A principal element of sensors 25 is sensing pendulum 30 suspended by a universal joint 31 from crane drive 45, which is typically a hoist trolley that is driven in response to crane control 40. Universal joint 31 can be any of a variety of devices that allow pendulum 30 to swing in any direction in a lateral x-y plane, as

illustrated. Universal joint 31 can thus be a ball joint, hook and ring joint, double clevises perpendicular to each other, etc. Preferably, joint 31 is compact, involves low friction, and enables pendulum 30 to swing responsively within the x-y plane.

5           An x sensor 32 and a y sensor 33 are near a lower region of pendulum 30 where sensors 32 and 33 are arranged perpendicular to each other to respectively sense x and y direction swing movements of pendulum 30. Sensors 32 and 33 can have a variety of forms including mechanical, electromechanical, and optical; and preferences among  
10 these forms include linear encoders, optical encoders, and electrical devices responsive to small movements. Sensors 32 and 33 preferably sense magnitude as well as direction of swinging movement of sensing pendulum 30, and sensors 32 and 33 are connected with crane control 40 to supply both amplitude and directional information on movement  
15 sensed by pendulum 30.

For pendant crane 10 to be successful in determining the force input of worker 11 and moving load 20 to a desired position, it is important for crane control 40 to receive information indicating the mass of any load 20 involved in the movement. The force or mass of  
20 load 20 is preferably sensed by a load cell or strain gauge 35 incorporated into sensing pendulum 30, but other possibilities can also be used. A load sensor incorporated into or suspended below hoist 50, for example. There are advantages, though, in including load sensor 35 in a compact package including directional force sensors 32 and 33  
25 arranged above hoist 50. If lifting height constraints are a problem for a particular pendant crane, it is possible to arrange sensors 25 between a pair of bridge beams separated by enough space to receive sensors 25 so that hoist 50 can be suspended directly below the pair of bridge beams at the same elevation that it would have had if  
30 suspended from a single bridge beam.

In operation, once load 20 is lifted by hoist 50, worker 11 pushes against load 20 to indicate a desired direction of movement. Deflection of load 20 and rope 21 will depend on the force of directional input from worker 11 and by the mass of load 20. This will cause some  
35 movement of load 20 and rope 21 and some smaller movement of hoist

50. It will also cause movement of sensing pendulum 30 above hoist 50, and this movement will be sensed by detectors 32 and 33 for both amplitude and direction. The detected lateral movement of pendulum 30 is fed to crane control 40, along with information on the mass of load 20, as sensed by load sensor cell 35. With these inputs, control software within crane control 40 sends information to crane drive 45, which moves a crane trolley or bridge in the direction indicated by the worker.

Starting crane 10 in motion can cause pendulum effects in load 20 and hoist 50 in response to crane movement. It is important for crane control 40 not to respond erroneously to such pendulum effects from crane movement and to respond only to movement effects from input of worker 11. Arranging sensors 25 above hoist 50 helps in making this distinction. Software in crane control 40, when provided by signals from sensors 32, 33, and 35 arranged above hoist 50 can more reliably distinguish directional force input of worker 11 from responsive swings of the two-link pendulum formed of hoist 50 and load 20. Experience has shown that making this distinction by sensing pendulum movements of load 20 or hoist 50 is daunting compared to making the same distinctions by using sensing pendulum 30 arranged above hoist 50.

**I CLAIM:**

1. A pendant responsive crane control system, comprising:  
a swinging link between a hoist for lifting a load and a crane drive  
for moving said hoist;  
5 lateral movement sensor means that generates signals in  
response to lateral movement of said swinging link; and  
crane control means directing lateral movement of said crane  
drive in response to the signals generated by said sensors.
2. A pendant responsive crane control system as set forth in  
10 claim 1, wherein said swinging link is directly connected to said crane  
drive.
3. A pendant responsive crane control system as set forth in  
claim 1, wherein said swinging link is directly connected to said crane  
drive by a universal joint.
- 15 4. A pendant responsive crane control system as set forth in  
claim 1, wherein said sensor means generates signals indicating  
direction of lateral movement.
5. A pendant responsive crane control system as set forth in  
claim 1, wherein said sensor means generates signals indicating the  
20 direction and magnitude of lateral movement.
6. A pendant responsive crane control system as set forth in  
claim 1, further comprising a load sensor that generates load signals in  
response to the load thereon.
7. A pendant responsive crane control system as set forth in  
25 claim 6, wherein said load sensor is located above said hoist.
8. A pendant responsive crane control system as described in  
claim 7, wherein said swinging link includes said load sensor.
9. A pendant responsive crane control system as set forth in  
claim 8, wherein said load sensor is a load cell.

10. A method for controlling a pendant responsive crane system, comprising:

generating lateral movement signals via lateral movement sensors responsive to lateral movement of a swinging link positioned between a hoist for lifting a load and a crane drive for moving said hoist; and

directing lateral movement of said crane drive via a crane control means responsive to the signals generated by said sensors.

11. A method for controlling a pendant responsive crane system as set forth in claim 10, said first step further comprising generating load signals via load sensors.

12. A pendant responsive crane control system, comprising: a swinging link between a hoist for lifting a load and a crane drive for moving said hoist;

lateral movement sensor means that generates signals in response to lateral movement of said swinging link indicating the direction and magnitude of said lateral movement;

a load sensor generating load signals in response to the load thereon; and

crane control means directing lateral movement of said crane drive in response to the signals generated by said sensors.


13. A pendant responsive crane control system as set forth in claim 12, wherein said swinging link is directly connected to said crane drive by a universal joint.


14. A pendant responsive crane control system as set forth in claim 12, wherein said load sensor is located above said hoist.

15. A pendant responsive crane control system as described in claim 12, wherein said swinging link includes said load sensor.

16. A pendant responsive crane control system as set forth in claim 12, wherein said load sensor is a load cell.

1/2

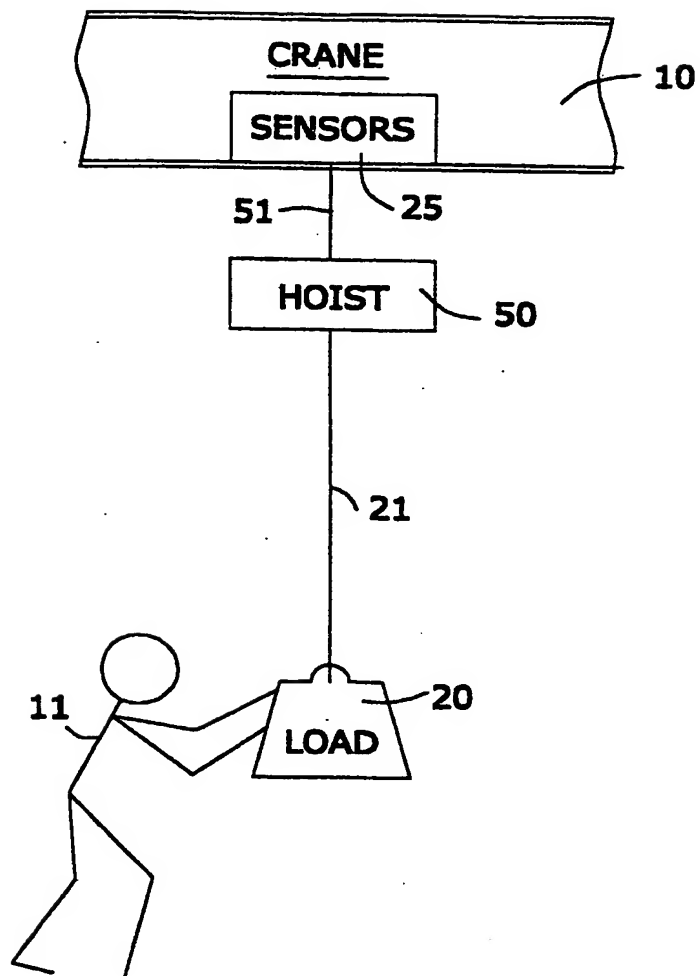**FIG.1**

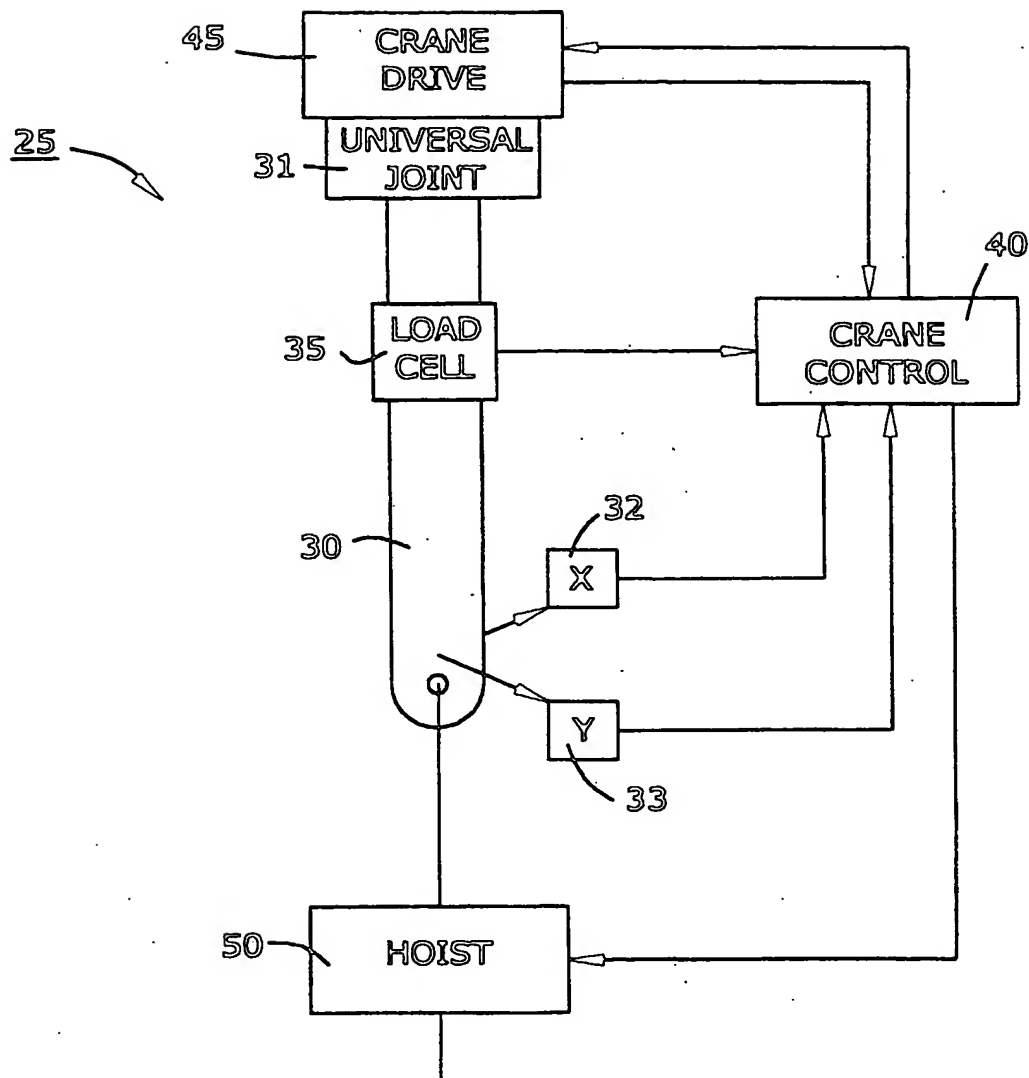FIG.2

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/32245

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : B66C 11/00

US CL : 212/285

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 212/285, 267, 288, 289

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,350,075 A (KAHLMAN) 27 September 1994.	NONE
A	US 5,850,928 A (KAHLMAN et al) 22 December 1998.	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"G" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 08 MARCH 2002	Date of mailing of the international search report 18 APR 2002
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer THOMAS J. BRAHAN <i>Diane Smith</i> Telephone No. (703) 305-1113